


# TERASHIELD REVO

Windshield Protection Film

exclusively at



## Product Configuration

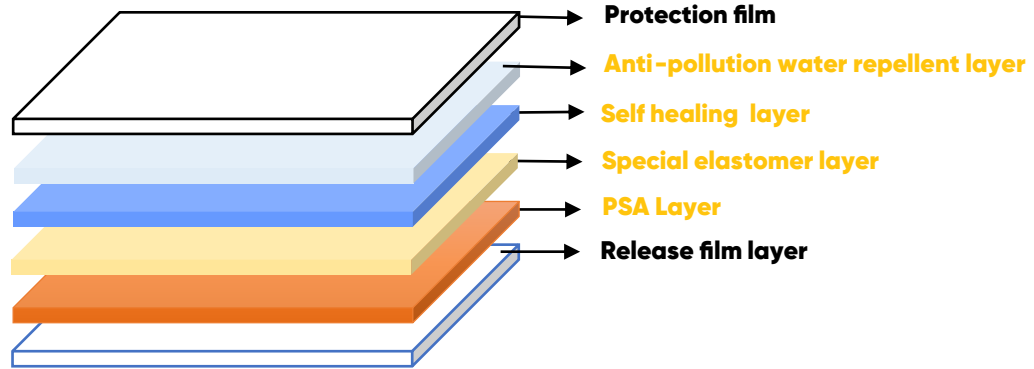

## Properties

PROPERTY	ITEM	RESULT	REFERENCE
Physical Properties	Total thickness ( $\mu\text{m}$ )	175	Thickness gauge (1/1000mm) exclude Release & protect film
	Adhesive strength(gf/inch)	> 200	ASTM D 3330
	Scratch restoration	Immediately ~ in a few minutes	Copper brush(Room Temperature ) Restored faster at higher temperatures
	Contact angle (Water)	108~110°	ASTM D5946
	Y.I ( $\Delta E$ )	< 1.0	ASTM G 53, ASTM E308
Optical Properties	UV Shield (%)	> 98	UV METER
	Transmission (%)	> 90	CM 3600A Konica
	Haze (%)	< 0.8	

## Characteristics

- > 98% UV blocking function.
- The clear film exterior without any bends ensures a clear front view without any refraction.
- The highly elastic and flexible new material protects the windshield and driver from impacts such as stone chips while driving.
- The surface coating prevents contamination and the water-repellent coating layer ensures clear vision.
- Even when attached to the outside of the windshield, there are no cracks in the surface coating due to continuous sunlight, and the use of non-yellowing type polymer prevents long-term yellowing.

## Use

- For use on vehicle windshield or sunroofs

This document is based upon Interconix quality system & quality system procedures  
But this does not imply that the effects noted herein are guaranteed

